

# Pressure Transmitter DMU 891

For pressure from 0,1 bar up to 1600 bar

Page : M 600 - 1e

Issue 07 / 12

## General features

Relative pressure measurement through a piezoresistive sensor, temperature compensated.  
Sealed stainless steel body, filled with silicon oil, with built in electronics and provides normally IP 65 protection.

The transmitter converts the applied pressure spans into a pressure proportional standard two wire current loop signal of 4...20 mA. The process coupling is threaded G 1/2, DIN 16288. The electrical connection is an angled connector according to DIN 43650.

## Special characteristics



- ⇒ Wetted parts of stainless steel
- ⇒ Case of stainless steel
- ⇒ Wiring with plug
- ⇒ Ingress protection IP 65 to IP 68

## Technical Data

Pressure connection	G 1/2
Power supply	10...30 VDC
Signal output	4...20 mA, 2-wire system
maximum load R	$R = (U_B - 10 \text{ V}) / 0,02 \text{ A}$
Accuracy	0,5% of span
Hysteresis	< 0,1% of span
Permissible temperature of medium	-30...+100°C
Degree of protection	IP 65

Pressure ranges	Article-Numbers
0...1 bar	DMU891 - 1
0...4 bar	DMU891 - 4
0...6 bar	DMU891 - 6
0...10 bar	DMU891 - 10
0...16 bar	DMU891 - 16
0...25 bar	DMU891 - 25
0...40 bar	DMU891 - 40

Other ranges on request

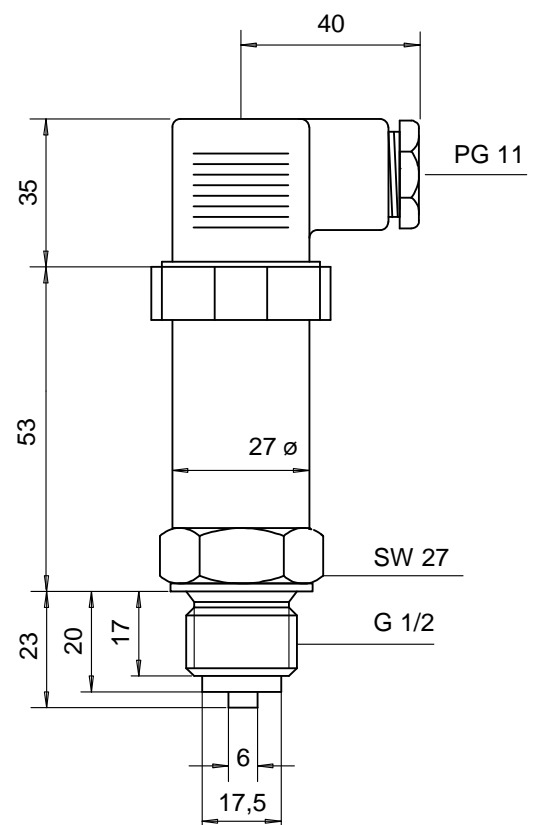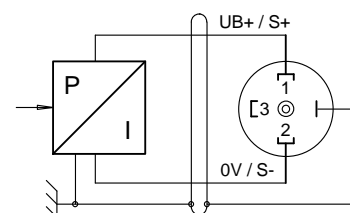

PLÖGER SENSOR GMBH

Tel. 040 / 299 48 91  
Fax. 040 / 299 33 88  
www.ploeger-sensor.de